


DESCRIPTION

The RM-210F is an expansion unit dedicated for the RM-300X Desk top remote microphone. The number of zone selection keys and indicators of the RM-300X can be increased in 10 units per RM-210F.


SPECIFICATIONS

| | |
|-----------------------|---|
| Power Source | Supplied from the RM-300X (option) |
| AC Power Consumption | 2.4 W (Including power supply loss of the Emergency power panel) 0.4 W (Standby, including power supply loss of the Emergency power panel) |
| Current Consumption | 80 mA or less (Increase in power input at the RM-300X (option)) |
| Operation | Zone selection key × 10 |
| Indicators | Function switch indicator × 10, Zone selection indicator × 10 |
| Operating Temperature | 0 °C to +40 °C (32 °F to 104 °F) |
| Operating Humidity | 35 % to 80 %RH (no condensation) |
| Finish | ABS resin, black, semi-gloss |
| Dimensions | 110 (W) × 76.5 (H) × 215 (D) mm (4.33" × 3.01" × 8.46") |
| Weight | 350 g (0.77 lb) |
| Accessory | Connection cable (8 pins, 8 cm (3.15")) ×1, Joint bracket A ×2, Joint bracket B ×1, Screw for joint bracket ×12 |
| Applicable Unit | Remote microphone: RM-300X |
| Option | Wall mounting bracket: WB-RM200 |


APPEARANCE



Rear View

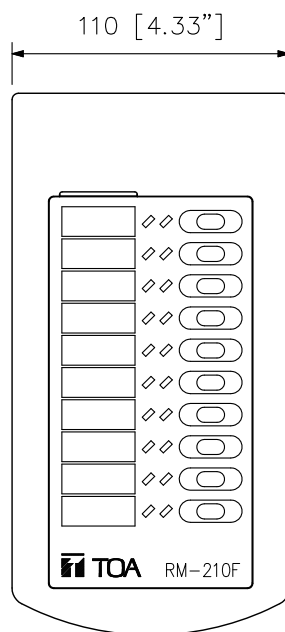

Top View

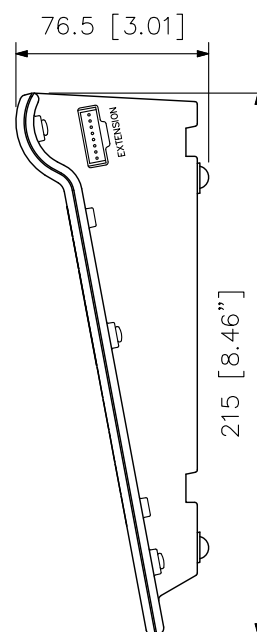

Side View

UNIT: mm SCALE: 1/3