


DESCRIPTION

The BC-2000 is a dedicated battery charger for the WM-D5200 Digital wireless microphone and WM-D5300 Digital wireless transmitter. It works with the optional AD-5000-2 AC adapter. The BC-2000 employs a quick charging system for nickel-metal hydride (Ni-MH) batteries, allowing up to 2 units to be fully charged within 3 hours.


SPECIFICATIONS

Power Source	12 V DC (Optional AC Adapter AD-5000-2 must be used)
Current Consumption	700 mA
Charging Time	Max. 3 hours
Number of Units to be Charged Simultaneously	2 pieces
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	30 % to 85 %RH (no condensation)
Finish	Case: ABS resin, black, semi-gloss, paint Rechargeable unit receptacle section: PPE resin, black
Dimensions	238 (W) × 108.5 (H) × 98 (D) mm (9.37" × 4.27" × 3.86")
Weight	550 g (1.21 lb)
Option	Ni-MH battery: WB-2000-2 (containing 2 pieces) AC adapter: AD-5000-2


APPEARANCE

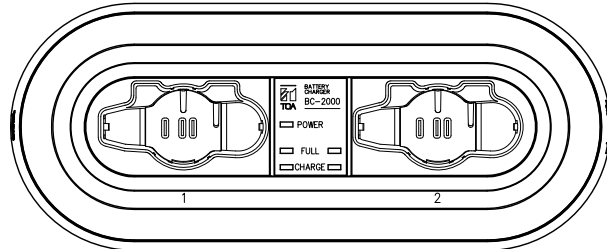


Top View



Left Side View

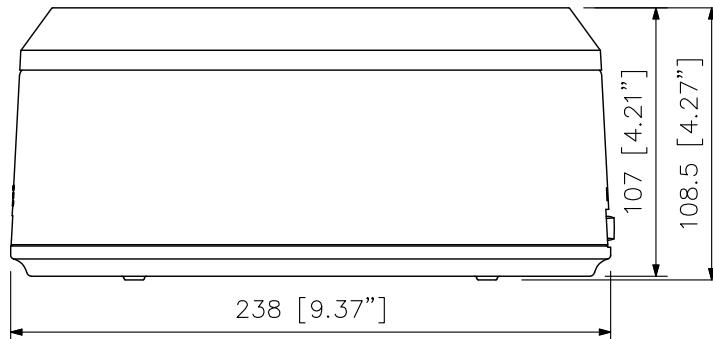

Front View



Right Side View

UNIT: mm SCALE: 1/3